



Issue: 2.1

FLYER 6 SUNdeck



Table of contents

Introduction	Exterior	Interior	Systems
Specifications	Key selling points	Key selling points	Performances
Design	Ambiance versions	Cabin	
Technology	Cockpit		
	Bow sunpad		
	Pilot station		
	Dimensions		



General specifications




LOA standard	5,52 m	18'1"
LOA with options	5,96 m	19'7"
Hull length	5,30 m	17'5"
Overall beam	2,26 m	7'5"
Hull beam	2,23 m	7'4"
Air draft standard	1,65 m	5'5"
Displacement empty boat	930 kg	2050 lbs
Light displacement	1026 kg	2261 lbs
Light displacement without engines	1251 kg	2757 lbs
Fuel capacity	100 L	26 US Gal
Water capacity	50 L	13 US Gal
Maximum power	140 CV	140 HP
Engine shaft length	XL	XL
Certification CE	C6	C6
Architect	BENETEAU	BENETEAU
Designer	Style & Design	Style & Design

 Design





Technology: BENETEAU HULL DESIGN

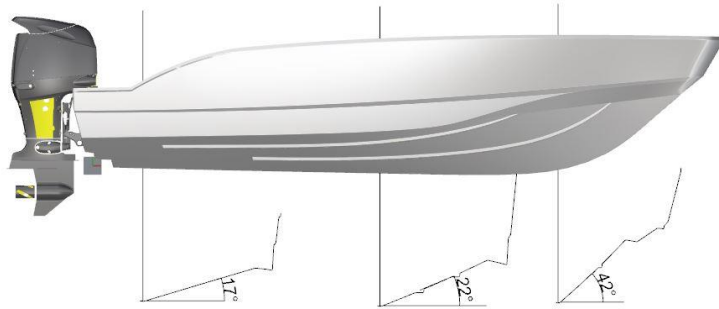


Technical features & benefits:

1. Narrow bow angle for good seaworthiness
2. Recessed flat chins to optimize stability and grip in turns
3. Spray bow rails to prevent water spray
4. Weight distribution to keep low center of gravity





Exterior key selling points

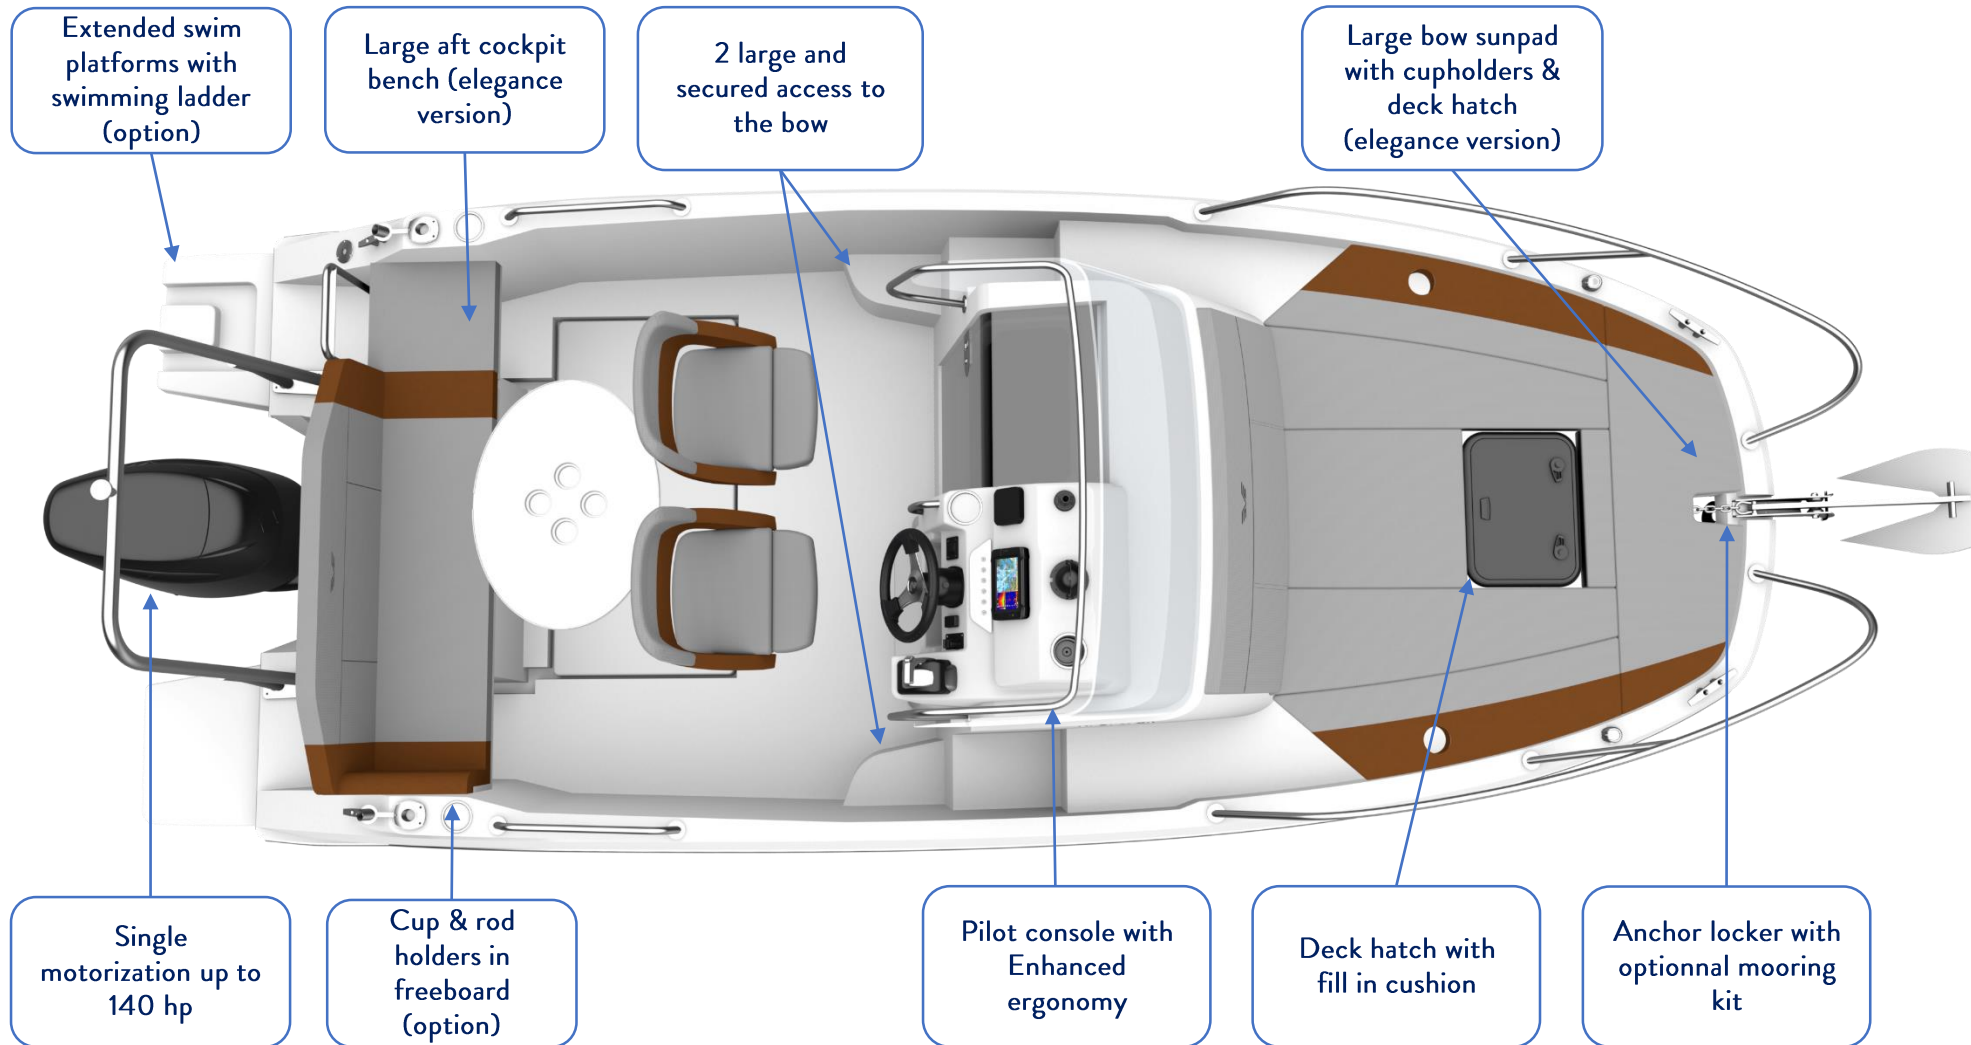




Exterior key selling points






Standard or elegance version

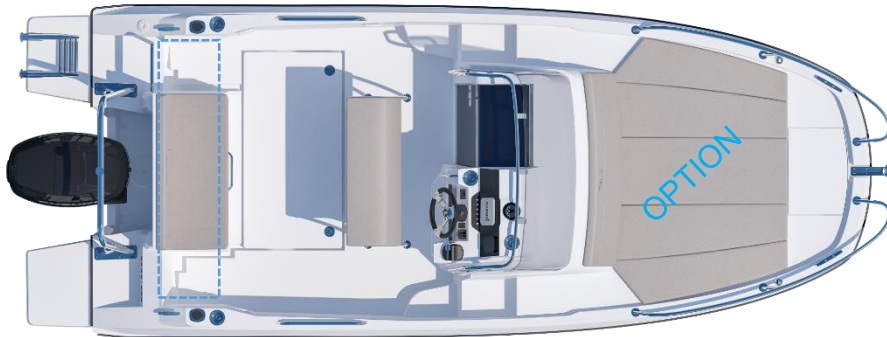

Standard version

- Central sliding aft bench
- Leaning post (possibility to upgrade for 2 bolster seats)
- Note:
 - Bow sunpad in option
 - Cockpit bench extension

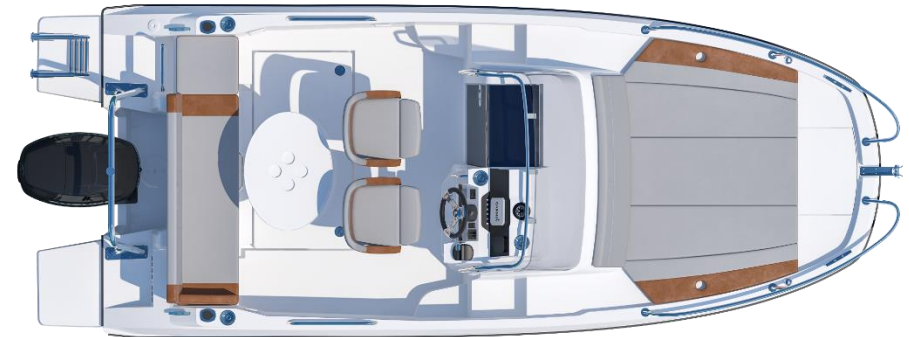


Elegance version

- Central sliding aft bench with extension
- Bolster seats
- Bow sunpad
- Deck hatch



Exterior dimensions (in mm)

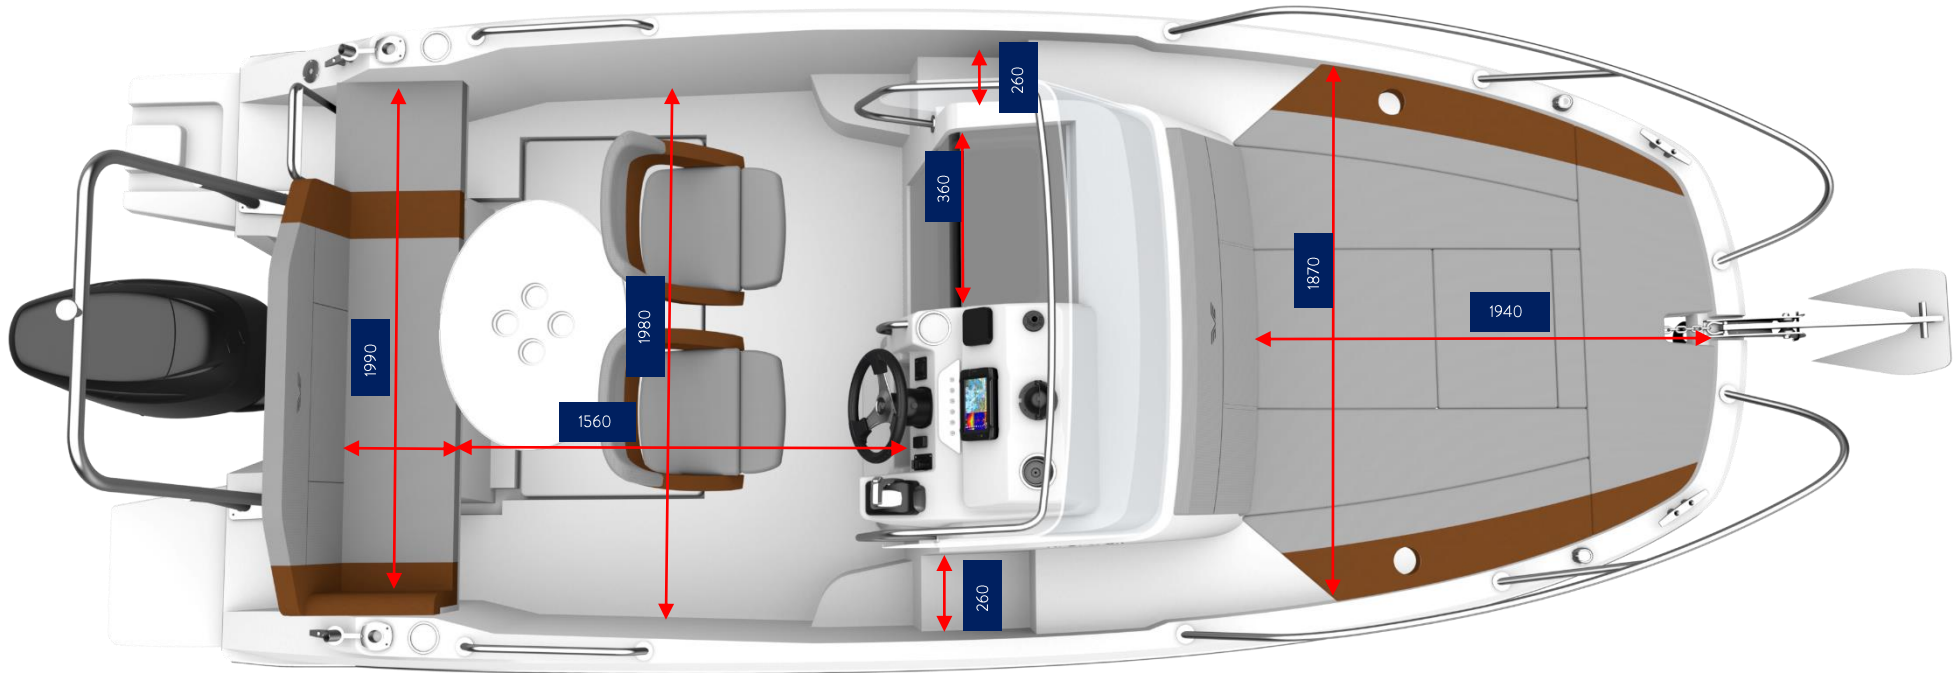

Headroom in cabin : 1480


 Cockpit

 Cockpit





Bow sunpad

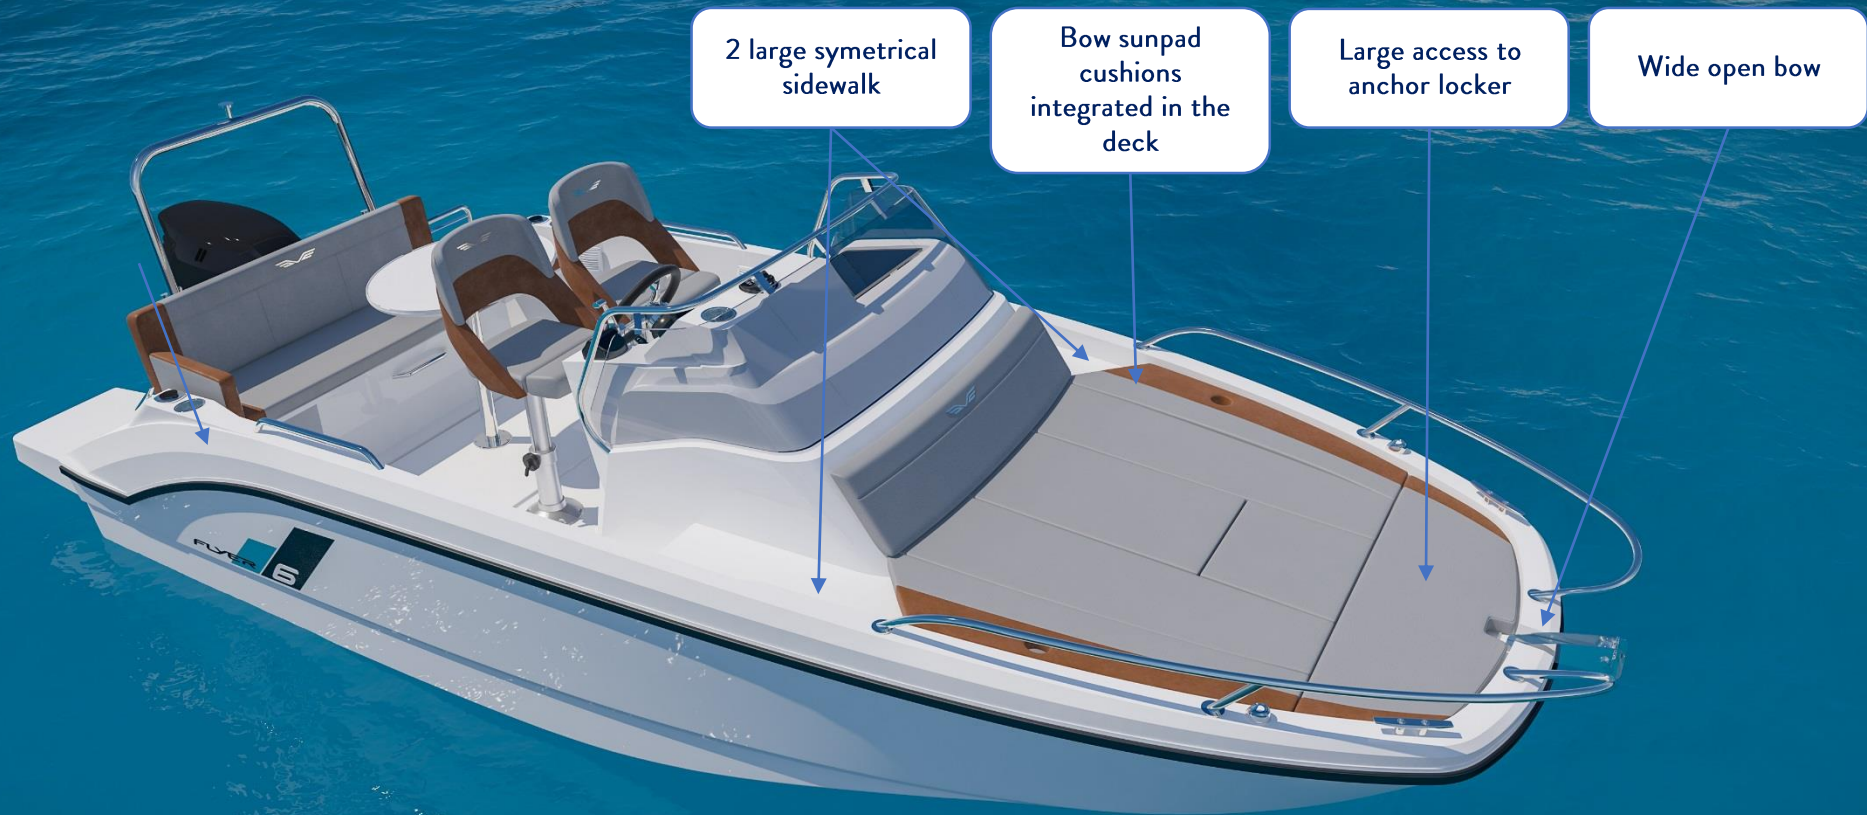



Pilot station



Cabin

Headroom in cabin : 1480

